

Group Telepresence 3351

Ideal for very large meeting rooms, theaters, and auditoriums

With next-generation, exceptionally intuitive video meeting systems, StarLeaf makes instant collaboration from any room simple.

Enjoy secure and reliable, feature-rich video meetings, easy calling, and instant screen sharing with anyone, anywhere. Built for professional AV integration, the Group Telepresence 3351 includes an advanced codec, StarLeaf Touch 2045 controller and support for two XLR microphones, two screens, and three cameras including a document camera.

Simple and intuitive, the Group Telepresence 3351 works seamlessly with existing video and voice. Put your meetings in safe hands with StarLeaf and our industry-unique 99.999% SLA uptime guarantee and ISO/IEC 27001 certification.



Simplicity for your large spaces


- Always ready and always up-to-date
- A complete purpose-built system with no need for PCs, remote controls, or adapters
- Easy installation and setup with QuickConnect
- Works seamlessly with existing video and voice including Cisco, Poly, Zoom, Microsoft Teams and Lifesize

Unrivaled intuitive user experience

- See upcoming meetings and join at the push of a button
- Meet with anyone, anywhere
- Advanced in-call controls
- Intuitive dedicated touchscreen controller

Reliability for your large spaces

- Join meetings instantly with one-touch
- Totally interoperable – users can call anyone on any video system and join meetings hosted by other providers with MultiJoin*
- Secure connection at all times
- Automatic software updates

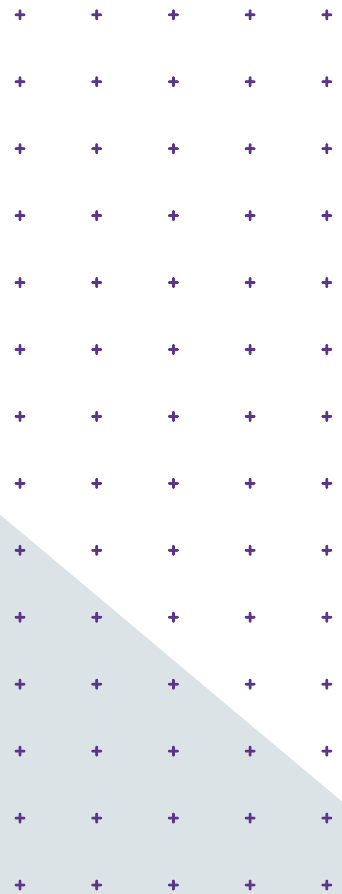

Video and audio connectors	
Input	3x HDMI in for camera input 3x Camera control port 1x DVI-I in for PC input 2x XLR for microphone input 1x Line in for stereo audio in Camera input resolution requirement: 720p50 or 720p60 only
Output	2x HDMI out for 1080p60 displays Line out for stereo audio out
Bandwidth	12k - 6Mbps
Installation	Plug and play with QuickConnect™ and Automatic speed test
Security	Secure and certificate-based authentication
Protocols	EVSIP, H.323, SIP, H.239, RDP, Skype for Business/Lync (CCCP/AVMCU), WebRTC, BFCP
Codec support	Wideband audio with AAC-ELD, AAC-LD, G.711 μ -law / A-law, G.722, G.722.1, Annex C, iLBC, H.263, H.263+, H.264, SVC, DTMF, Microsoft H.264 SVC, VP8
Video support	Main video send up to 720p60, receive up to 1080p30 Content send and receive up to 1080p30
Dimensions	(H x W x D) 3.5" x 16.5" x 13.2" / 90mm x 420mm x 335mm
Weight	15.5lbs / 7.5kg
Power supply	External autosensing power supply – 100 – 240 VAC 50/60 Hz 1.5A
Power consumption	Max 30W, idle 25W, standby 20W
Network	QoS – DiffServ/ToS
Network interfaces	1x Autosensing 10/100/1000 Ethernet LAN (RJ-45) 1x StarLeaf controller connection (RJ-45)
Temperature range	0°C - 35°C (32°F - 95°F)

*MultiJoin is available as part of a StarLeaf Enterprise Room Subscription



Meet better. Meet StarLeaf.

Collaboration and communication are key to the success of today's business organizations. StarLeaf brings people together to work better, wherever they are. Uniquely in the industry, StarLeaf is truly built for the enterprise.

starleaf.com



StarLeaf is
ISO/IEC 27001 certified

IS 698213